


Fans

RQWC

The RQWC flying line has been designed to offer a range of impellers with low weight, low inertia, low noise, high efficiency and the widest application availability.

Five variable-pitch blades to limit noise frequencies and reach best specific performances

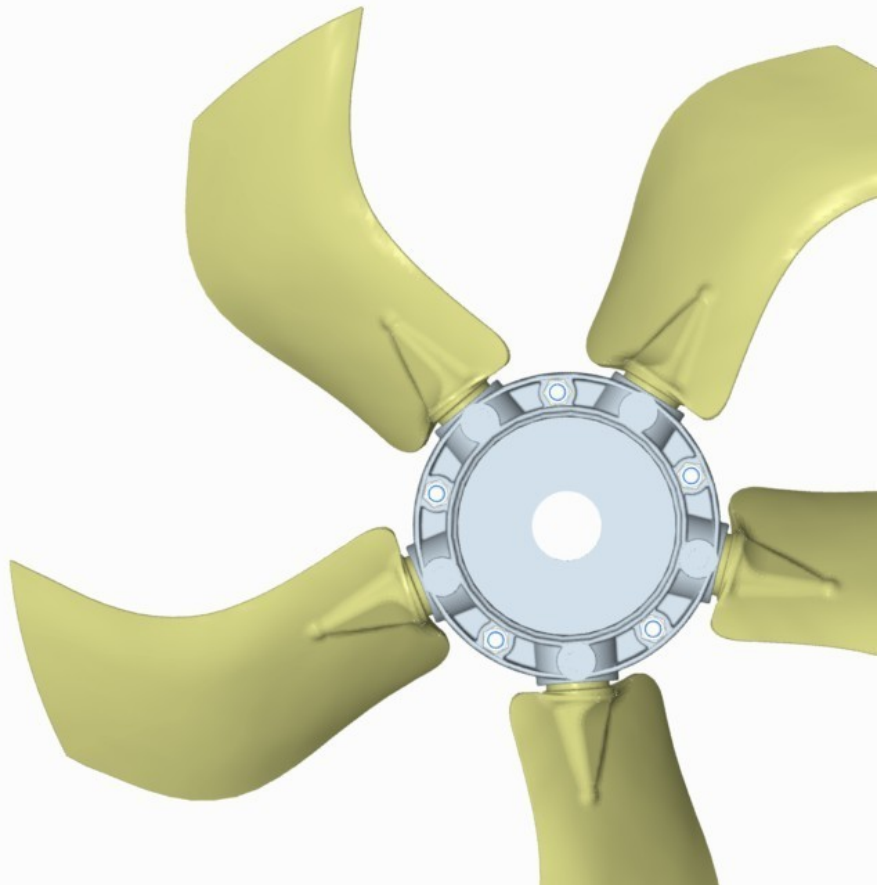

TECHNICAL FEATURES

- 5 blades in PA66 GF30
- Diecasted aluminium hubs
- Customized diameter on request, max 457mm
- Puller and pusher clockwise rotation
- Variable pitch 40° to 55°
- Temperature range -30°C to +110°C
- Customized fixing holes
- Possibility of assembling standard diecasted alu hubs



Via Torino 272, 10040 Leini (TO) Italy

Tel.: (+39) 011.998.07.77


Fax: (+39) 011.997.35.35

<http://www.fratellirosati.it>


E-mail: info@fratellirosati.it

Fans

RQWC

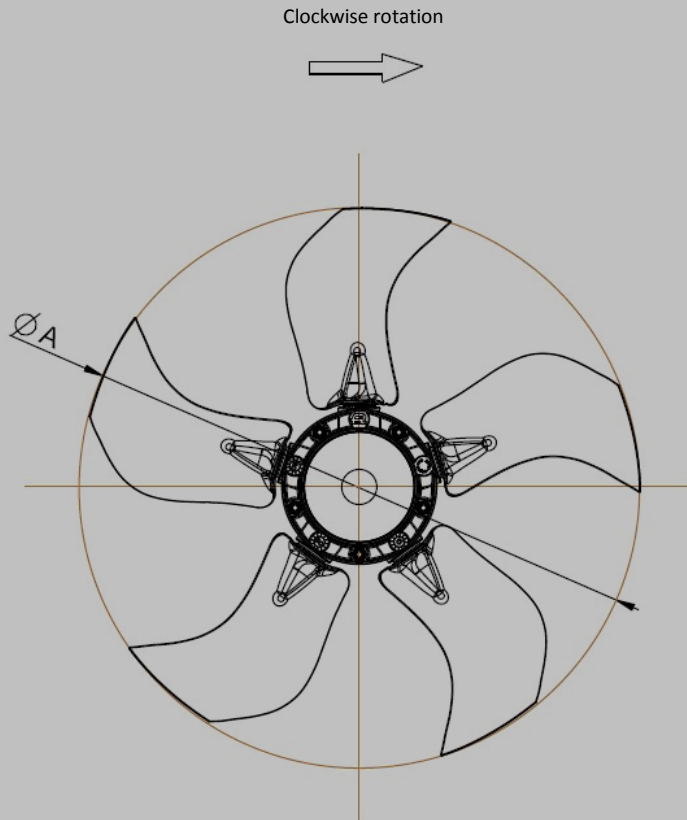

		Ø A					
		406			457		
		B	C	D	B	C	D
Pitch angle	40°	64	61	41	64	61	41
	45°	67	70	45	67	70	45
	50°	70	78	49	70	79	49
	55°	74	85	52	74	88	52

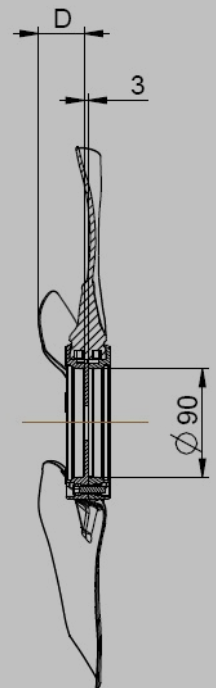









All measures are expressed in millimeters.

Fans

RQWC

PERFORMANCES

Ø 406 mm

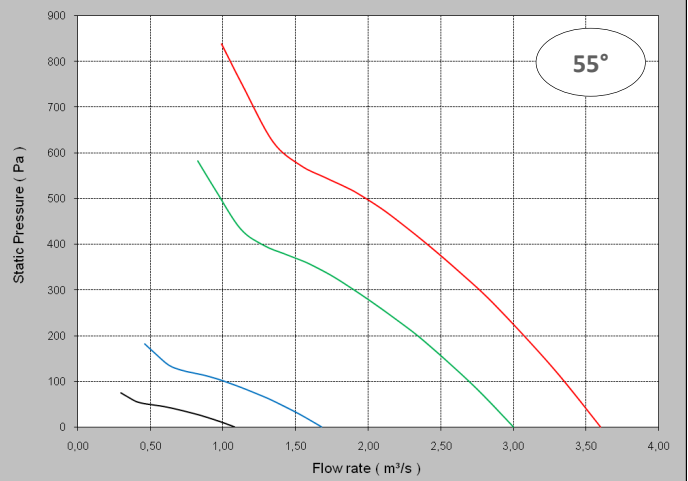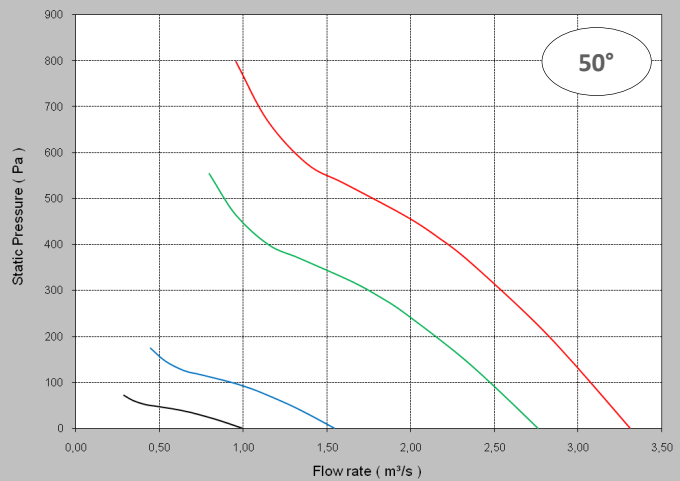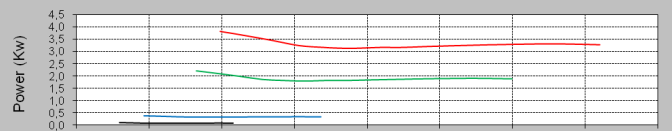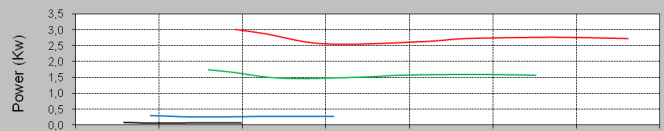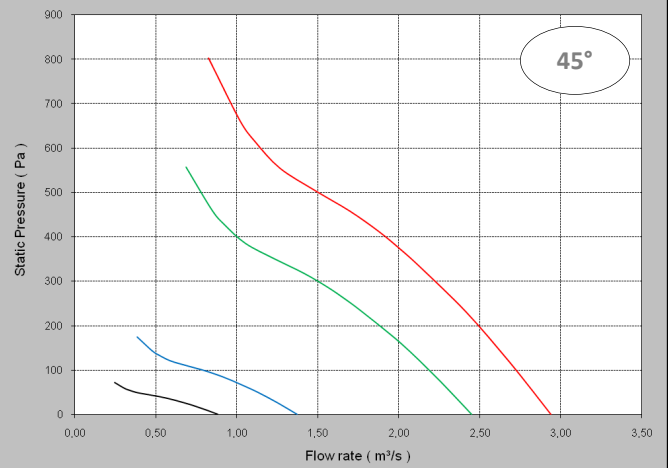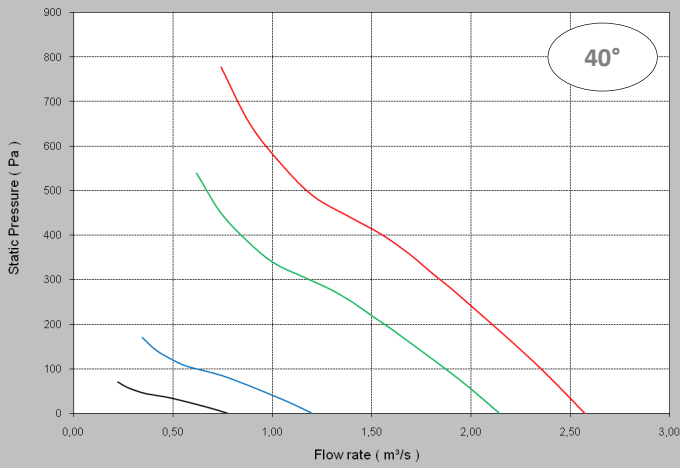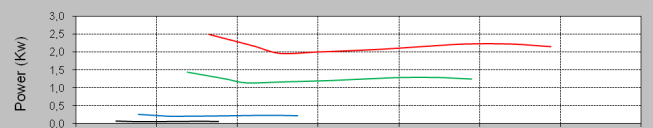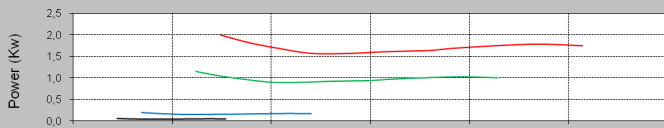








SPEED ROTATION : ■ 3000 RPM ■ 2500 RPM ■ 1400 RPM ■ 900 RPM

Fans

RQWC

PERFORMANCES

Ø 457 mm

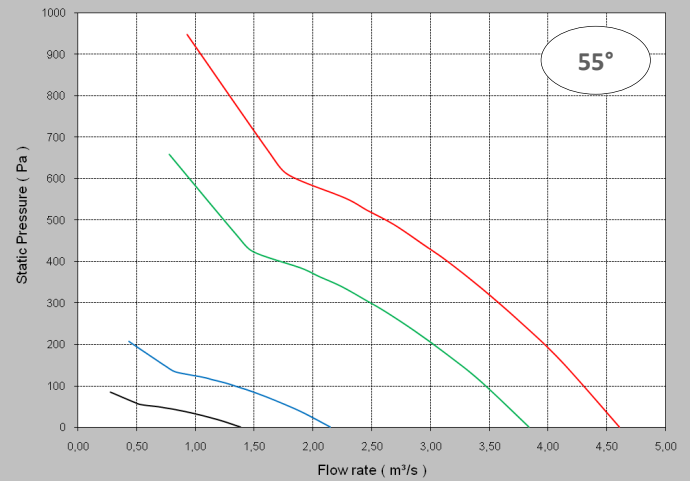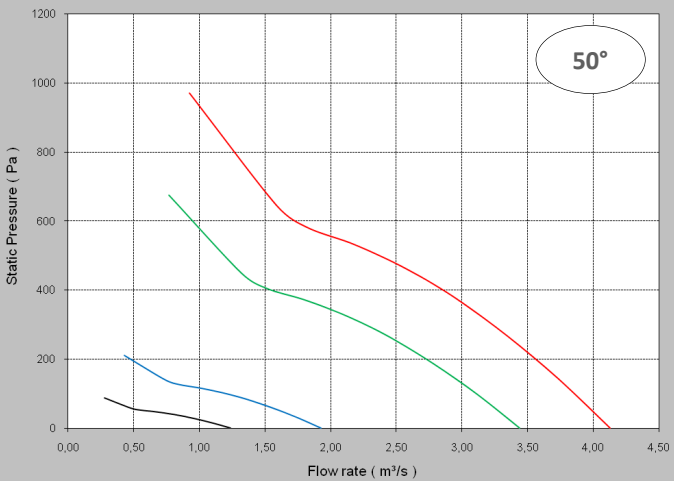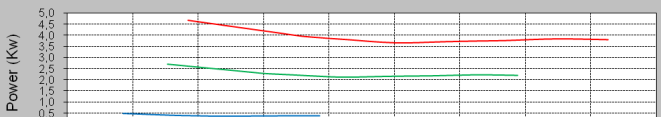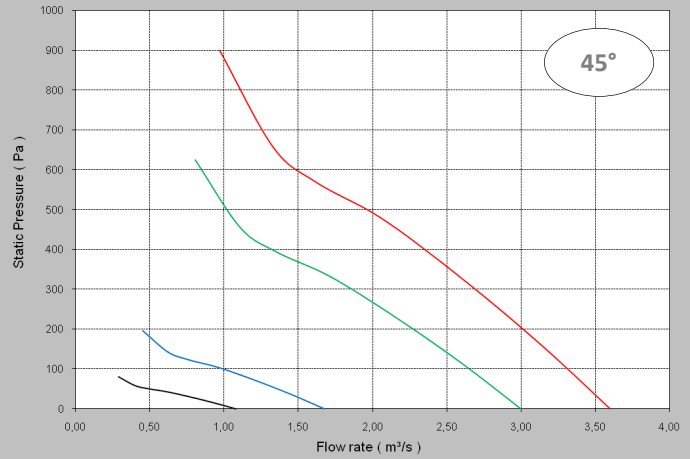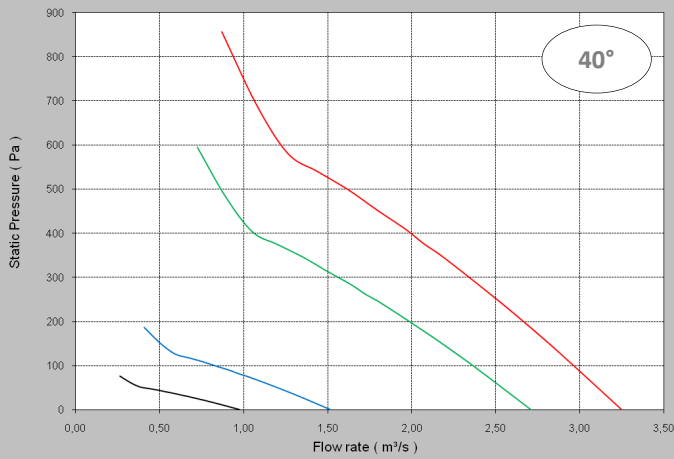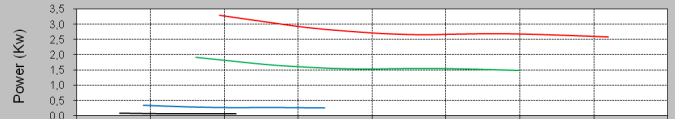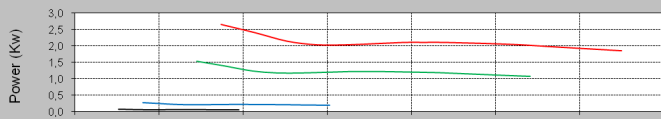

SPEED ROTATION : ■ 3000 RPM ■ 2500 RPM ■ 1400 RPM ■ 900 RPM