


Fans

RSQF

Our RSQF new range was designed to present low weight, low inertia, low noise fans together with high performances and high efficiency.

Such range allows wide availability of applications, including visco-clutch driving.

It is a reliable solution for every application, either on tractors or on earth-moving machines, or for steady installations.

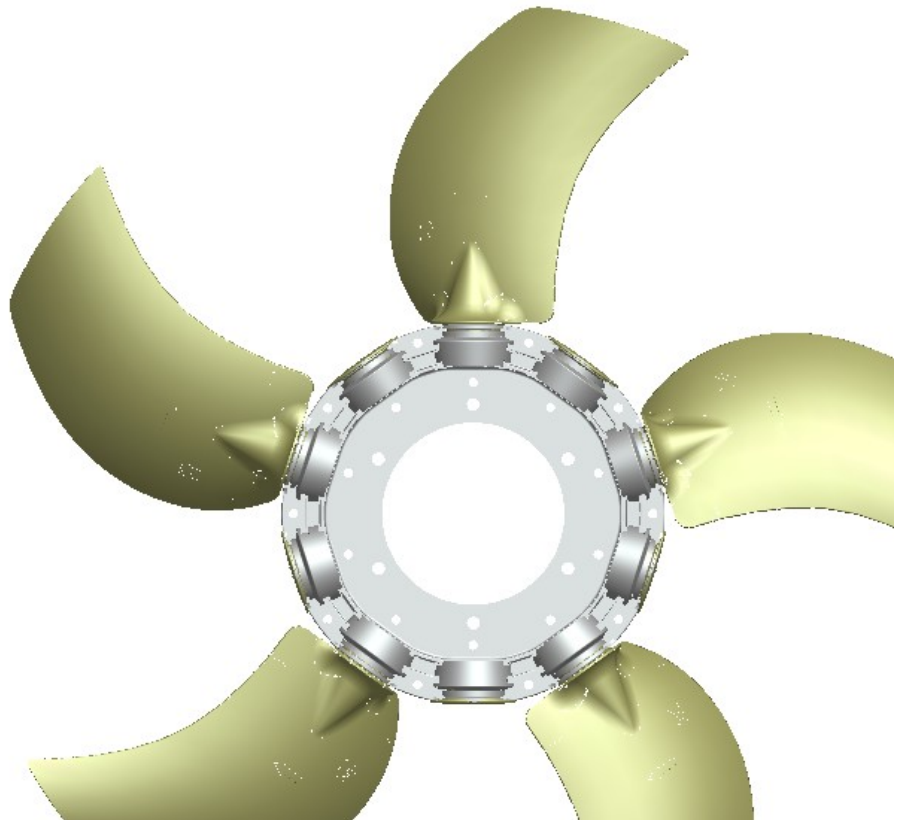

TECHNICAL FEATURES

- 5 blades in PA66 GF30
- Diecasted aluminium hubs
- Customized diameter on request, max 711mm
- Puller and pusher clockwise rotation
- Variable pitch 30° to 47.5°
- Temperature range -30°C to +110°C
- Customized fixing holes
- Possibility of assembling standard diecasted alu hubs



Via Torino 272, 10040 Leini (TO) Italy

Tel.: (+39) 011.998.07.77



Fax: (+39) 011.997.35.35

<http://www.fratellirosati.it>

E-mail: info@fratellirosati.it

Fans

RSQF

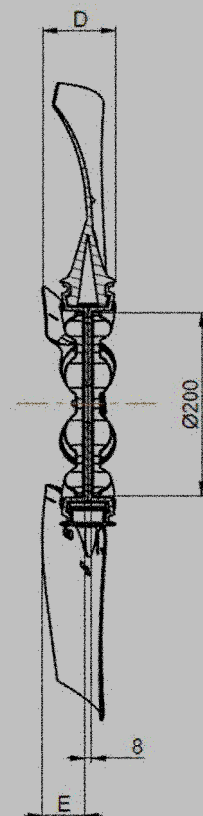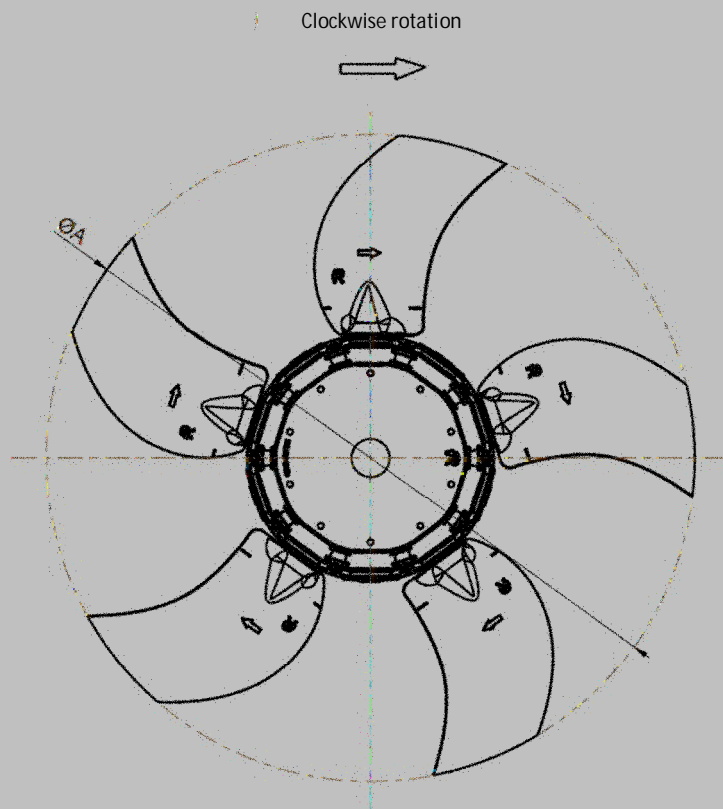

		Ø A															
		550				600				650				711			
		B	C	D	E	B	C	D	E	B	C	D	E	B	C	D	E
Pitch angle	30°	64	4	79	45	64	8	79	45	64	13	79	45	66	17	79	45
	32.5°	69	5	81	47	70	9	81	47	72	15	81	47	75	21	81	47
	35°	76	6	84	50	77	11	84	50	79	18	84	50	83	25	84	50
	37.5°	82	6	86	52	84	12	86	52	87	20	86	52	92	29	86	52
	40°	88	7	89	55	91	14	89	55	95	23	89	55	101	33	89	55
	42.5°	94	8	91	57	97	15	91	57	102	25	91	57	109	36	91	57
	45°	100	9	93	59	104	17	93	59	110	28	93	59	117	40	93	59
	47.5°	105	10	95	61	110	18	95	61	117	30	95	61	125	44	95	61

All measures are expressed in millimeters.
Puller version indicated.